


TO INSTALL NOZZLE BODY, DRILL 3/8" (9.5MM) DIA. HOLE IN PIPE, DEBURR, THEN INSERT SPLIT-EYELET INLET AND CLAMP ASSEMBLY IN PLACE

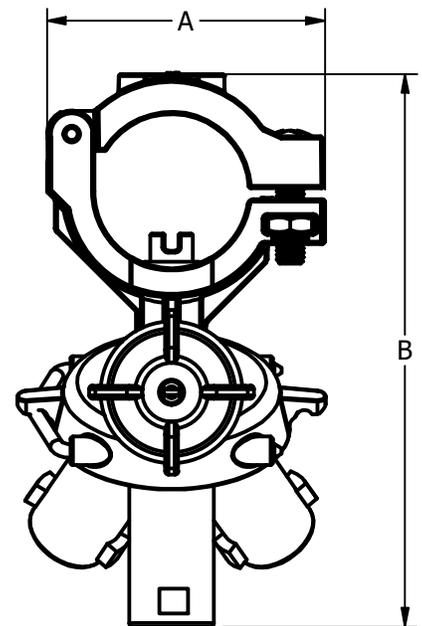

OTHER FEATURES:

- UPPER CLAMP INCLUDED WITH ASSEMBLY.
- QUICK HAND INDEXING WITH CHOICE OF THREE DIFFERENT SPRAY POSITIONS FOR EASIER CHANGING OF SPRAY PATTERNS OR APPLICATION RATES
- DRIP-FREE POSITIVE SHUT-OFF.
- SHUT-OFF POSITION PROVIDED BETWEEN ANY TWO SPRAYING POSITIONS.
- FAST AND EASY WAY TO MOUNT SPRAY NOZZLES TO A BOOM.
- MADE OF CORROSION RESISTANT MATERIALS.
- MAXIMUM OPERATING PRESSURE - 300 PSI (20 BAR)
- 8MM HEX SOCKET ON UPPER CLAMP STANDARD.

HOW TO ORDER:
QJ24216B--NYB**

****SPECIFY PIPE SIZE**
 SIZES AVAILABLE: 20mm, 25mm, 1/2", 3/4", 1"

PIPE SIZE	"A" (APPROX)	"B" (APPROX)
20mm	1.86	4.30
25mm	2.14	4.56
1/2"	1.93	4.36
3/4"	2.14	4.56
1"	2.40	4.83

DESCRIPTION: NO. QJ24216B-__-NYB QUICK TEEJET®TRIPLE OUTLET NOZZLE BODY		
	REVISION NO. 1	Data Sheet No. QJ24216B
	REFERENCE: 2/1/23	SHEET: 1 OF 1 DWG SIZE: A