




# VarioSelect® / VarioSelect® II 2- and 4-way nozzle holder

2-way or 4-way nozzle holder with pneumatic control for variable application rate control.

### Advantages

- Operation optionally in „Vario“ or „Select“ mode
  - Vario: Fully-automatic control of nozzles/nozzle combination and continuously variable adaptation of the application rate and pressure
  - Select: Manual activation and deactivation of individual nozzles/nozzle combinations
- V2 in new more compact design with proven PSV valve technology (see page 101)
- V4 in modular design
- Single valve located directly in front of the nozzle
- Central liquid supply

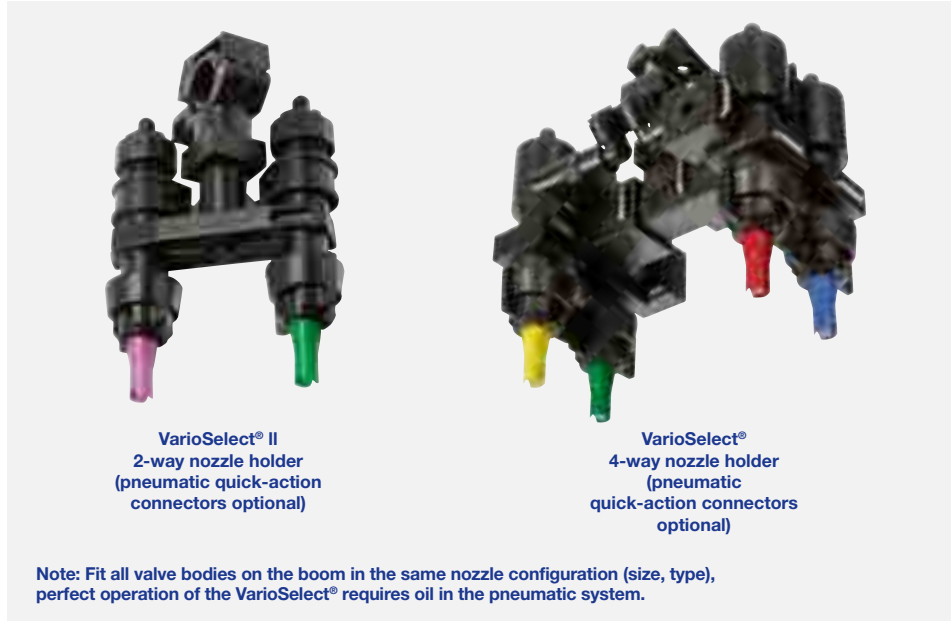

### Material

POM, POM fibre glass reinforced, EPDM, Viton, FPM, stainless steel



### Emergency stop

at input voltage  
4.5 bar



### Switching valve

0.2 sec



### Pressure range

Max. 8 bar

### Code for pipe diameter:

20 mm	20
25 mm	25
1/2", 22 mm	21
3/4"	27
1"	34


### Code for pre-assembled pneumatic quick-action connection (optional):

90°	A
Basis	B
Y	Y
Others on request.	


### Example of ordering

<b>V2, 1/2" with Y pneumatic connection</b>	<b>065.284.56.21.Y0.0</b>
<b>V4, 3/4" with 90° pneumatic connection</b>	<b>065.286.MN.27.A0.0</b>


### 2-way nozzle body V2

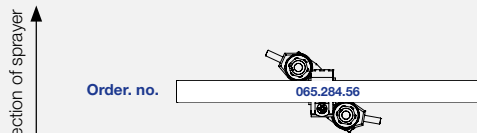

### Main dimensions of 2-way nozzle body 1/2"

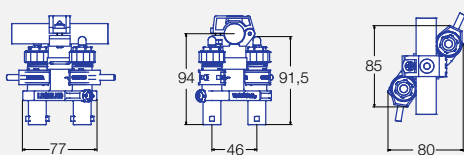

### 4-way nozzle body V4

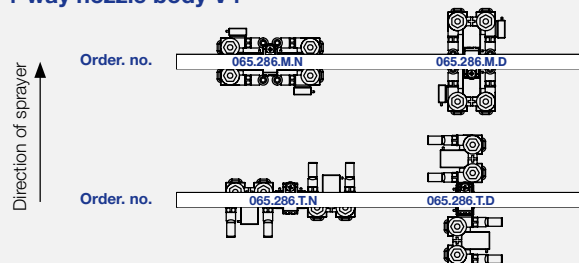

### Main dimensions of 4-way nozzle body 1/2"

